

# 4-1 SQUARE Boiling Water Tap

- + Filtered Boiling Water
- + Filtered Cold Water
- + Hot & Cold Mixer



## TAP FEATURES

- + Cool touch body
- + Heat Insulation
- + Triflow design – no water contamination
- + Child safety lock - auto shut off handle
- + 220 degree spout swivel
- + Fits standard 35mm tap hole
- + Independent tube for boiling water delivery. No cross contamination. Domestic water can be run immediately after.
- + Great heat preservation performance
- + Extra long tap hoses for easier installation - 700mm
- + WRAS approved

## TECHNICAL DATA

- + Min pressure: 1 Bar
- + Max pressure: 3 Bar\*
- + \*Note: the 4 in 1 instant hot water tap may safely be run from a higher pressure cold water supply provided a suitable pressure reducing valve is fitted to the cold water supply pipe.

## FLOW RATES

### At 1 Bar:


Key: L = Litre, Min = Minute  
Cold Water : 5.20L/Min  
Hot Water : 5.01L/Min  
Mix Water : 6.49L/Min  
Boiling Water : 2.37L/Min  
Filtered Water : 2.71L/Min

### At 3 Bar:

Key: L = Litre, Min = Minute  
Cold Water : 8.77L/Min  
Hot Water : 8.81L/Min  
Mix Water : 11.40L/Min  
Boiling Water : 4.33L/Min  
Filtered Water : 4.95L/Min

## DIMENSIONS

- + Height - 360mm
- + Spout to nozzle - 200mm
- + Base to nozzle - 257mm

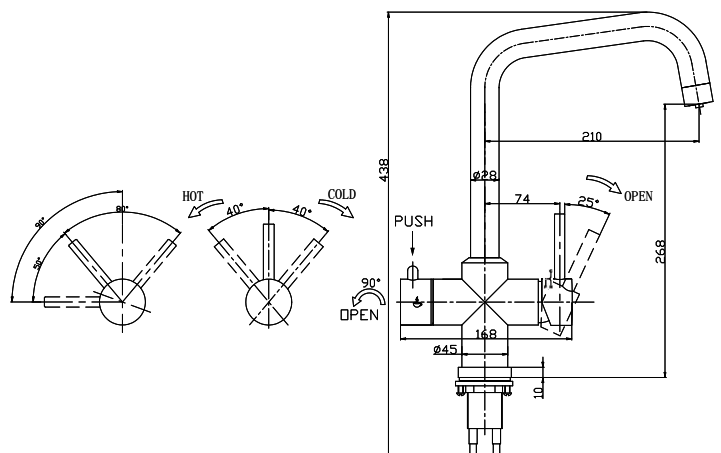



# DIGITAL Boiling Water Tank

## TANK FEATURES


- + Easy to read, touch sensitive LED digital temperature display
- + Durable powder coated carbon steel case or PET aircraft grade polymer
- + Materials certified to world recognised food safety standards
- + Accurate Temperature Control +/- 1 degree
- + 14 temperature settings - 45,55,65,75,85,90-98 degrees
- + 2.4 litres stored water capacity
- + Safety shut off
- + Compatible with all water pressures
- + No External Venting/Draining Required
- + ROHS compliant
- + Includes manufacturers standard parts and components

## TECHNICAL DATA

- + Min pressure: 1 Bar
- + Max pressure: 3 Bar\*
- + Source - 230v - 50Hz
- + Power - 1500 watts
- + Plugs in to standard UK socket
- + \*Note: the instant hot water tank may safely be run from a higher pressure cold water supply provided a suitable pressure reducing valve is fitted to the cold water supply pipe.

## DIMENSIONS

- + Height - 262mm
- + Width - 178mm
- + Depth - 245mm

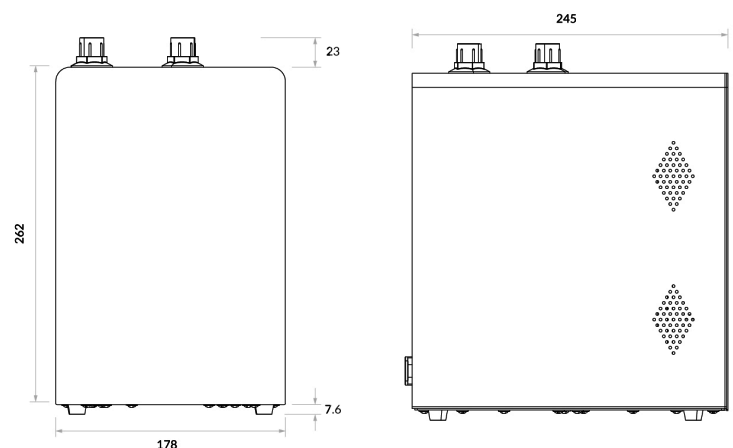

# DELUXE Water Filter

## FILTER FEATURES

- + Dual Filter – Filters for Taste and Scale protection
- + Filtration accuracy of 0.5µm
- + The technology used for scale reduction is Ion exchange. The limescale removal efficiency is around 98% as it destroys the construction to avoid Ca and Mg to form as CaCO<sub>3</sub> (Calcium Carbonate). The Ca and Mg are still left in the water as Ions and they are helpful with health.
- + Green and environment material: PH number is neutral, and the maximum dissolved is 1~3ppm/L, no poison and not harmful for humans.

## DIMENSIONS

- + Height - 313mm
- + Width - 92mm
- + Depth - 98mm

