


AM112 Basicmodul Slim

Wall concealed WC cistern

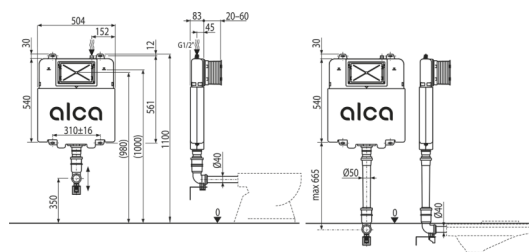

Application

For walling in and around – installation depth only 83 mm
For installing the stand-alone WC or a WC that is firmly embedded in the floor

Features

- Angle valve with the ability to connect to the Mepla piping system
- The construction of polystyrene insulation prevents condensation forming on the surface of the tank and dampens the vibrations from the tank into the building structure
- Dual flush independently adjustable with hygienic reserve
- Compatible with all flush plates Alca except sensor flush plates and NIGHT LIGHT
- The cistern is made of one piece, thus ensuring 100% impermeability
- Water supply from rear / top / left / right
- Maintenance work without using any tools
- The service opening cover simplifies assembly and prevents the penetration of moisture and impurities
- Mounting height 1070 mm
- Installation depth adjustable from 20–60 mm
- Installation depth 83 mm
- Material: polypropylene

Scope of supply

- Cistern with fill and flush valve
- Threading 1/2" for water connection with an integrated angle valve 1/2"–3/8"
- Fixation set: combi screw Ø8x120 – 4 pcs, dowel Ø12 – 4 pcs, screws 5x40, dowel Ø8
- Connection set Ø40 for connection to the toilet bowl from the water supply tank
- The 2 piece cover of the service opening is simply adjustable

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
AM1112	8595580550981	5,17 5,17 129,2 kg	965x515x110 965x110x515 mm	1 25 pcs

Warranty

2/15 years *

Norms

EN 14124, EN 14055

Technical specifications

- Water connection from the back or top via mounting holes G1/2 "
- Functional range of water pressure 0,05-1,6 MPa
- Recommended range of water pressure 0,3-0,5 MPa
- Factory setting of large flush 6 l
- Factory setting of small flush 3 l
- Hygienic reserve 3 l
- Water volume in the cistern 9 l