

# AM112-0005 WRAS

## Wall concealed WC cistern

### Application

For walling in and around – wet process


For installing the stand-alone WC or a WC that is firmly embedded in the floor

### Features

- Dispenser for WC cistern tablets included
- Angle valve with the ability to connect to the Mepla piping system
- The construction of the polystyrene insulation simplifies the process of walling-in, prevents condensation forming on the surface of the tank and dampens the vibrations from the tank into the building structure
- Dual flush independently adjustable with hygienic reserve
- Suitable for installation of remote or sensor flushing
- Compatible with all ALCA flush plates
- The cistern is made of one piece, thus ensuring 100% impermeability
- Water supply from rear / top / left / right
- Maintenance work without using any tools
- The service opening cover simplifies assembly and prevents the penetration of moisture and impurities
- Mounting height 1062 mm
- Installation depth adjustable from 20–95 mm
- Installation depth 128 mm
- Material: polypropylene
- Wall Hung Toilet Frame and Concealed Cistern AM101 certified according to WRAS standard (certificate no. 2206330)

### Scope of supply

- Cistern with fill and flush valve
- Threading 1/2" for water connection with an integrated angle valve 1/2"-3/8"
- Fixation set: screw Ø5×40 – 5 pcs, dowel Ø8 – 5 pcs
- Connection set Ø40 for connection to the toilet bowl from the water supply tank
- End-caps set for protecting the connecting holes during installation of the system
- The 2 piece cover of the service opening is simply adjustable
- Telescopic mounting brackets 2 pcs
- Perforated strap for attaching the cistern
- Collar
- Water supply sealing
- Holder + holder lock
- Rosette
- Wrapping seal
- Set for inserting toilet tablets

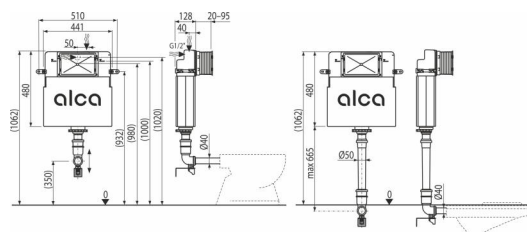

### Order number, Logistic information

Code	EAN	Weight (piece   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
AM112-0005	8595580581657	4,90   4,90   117,6 kg	1050×480×140   1050×480×140 mm	1   20 pcs

### Warranty

2/15 years \*

### Norms

EN 14124, EN 14055

### Technical specifications

- Water connection from the back or top via mounting holes G1/2 "
- Functional range of water pressure 0,05-1,0 MPa
- Recommended range of water pressure 0,3-0,5 MPa
- Large flush 6-9 l
- Small flush 2,5-3,5 l
- Factory setting of large flush 6 l
- Factory setting of small flush 3 l
- Hygienic reserve 3 l
- Water volume in the cistern 9 l